


ZMM1B...ZMM200B

Silicon Epitaxial Planar Zener Diodes

In MiniMELF case especially for automatic insertion.

These diodes are also available in DO-35 case with the type designation BZX55B...

LL-34

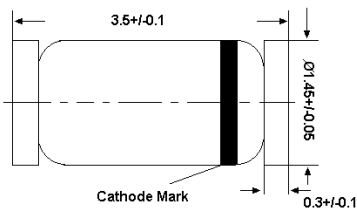

Glass case MiniMELF
Dimensions in mm

Absolute Maximum Ratings ($T_a = 25\text{ }^{\circ}\text{C}$)

Parameter	Symbol	Value	Unit
Power Dissipation	P_{tot}	500 ¹⁾	mW
Junction Temperature	T_j	175	$^{\circ}\text{C}$
Storage Temperature Range	T_{stg}	- 55 to + 175	$^{\circ}\text{C}$
¹⁾ Valid provided that electrodes are kept at ambient temperature			

Characteristics at $T_a = 25\text{ }^{\circ}\text{C}$

Parameter	Symbol	Max.	Unit
Thermal Resistance Junction to Ambient Air	R_{thA}	0.3 ¹⁾	K/mW
Forward Voltage at $I_F = 100\text{ mA}$	V_F	1	V
¹⁾ Valid provided that electrodes are kept at ambient temperature			



ZMM1B...ZMM200B

Characteristics at $T_a = 25\text{ }^{\circ}\text{C}$

Type	Zener Voltage Range ¹⁾			Dynamic Resistance			Reverse Leakage Current			Temp coefficient of Zener Voltage TKvz (%/K)
	V_{Znom}	V_{ZT}	at I_{ZT}	Z_{ZT}	Z_{ZK}	at I_{ZK}	$T_a = 25\text{ }^{\circ}\text{C}$	$T_a = 125\text{ }^{\circ}\text{C}$	at V_R	
	(V)	(V)	(mA)	Max. (Ω)	Max. (Ω)	(mA)	Max. (μA)	Max. (μA)	(V)	
ZMM1B ²⁾	0.75	0.73...0.77	5	8	50	1	-	-	-	-0.26...-0.23
ZMM2B0	2	1.96...2.04	5	85	600	1	100	200	1	-0.09...-0.06
ZMM2B2	2.2	2.15...2.25	5	85	600	1	75	160	1	-0.09...-0.06
ZMM2B4	2.4	2.35...2.45	5	85	600	1	50	100	1	-0.09...-0.06
ZMM2B7	2.7	2.64...2.75	5	85	600	1	10	50	1	-0.09...-0.06
ZMM3B0	3	2.94...3.06	5	85	600	1	4	40	1	-0.08...-0.05
ZMM3B3	3.3	3.23...3.36	5	85	600	1	2	40	1	-0.08...-0.05
ZMM3B6	3.6	3.52...3.67	5	85	600	1	2	40	1	-0.08...-0.05
ZMM3B9	3.9	3.82...3.98	5	85	600	1	2	40	1	-0.08...-0.05
ZMM4B3	4.3	4.21...4.39	5	75	600	1	1	20	1	-0.06...-0.03
ZMM4B7	4.7	4.6...4.8	5	60	600	1	0.5	10	1	-0.05...+0.02
ZMM5B1	5.1	4.99...5.2	5	35	550	1	0.1	2	1	-0.02...+0.02
ZMM5B6	5.6	5.49...5.71	5	25	450	1	0.1	2	1	-0.05...+0.05
ZMM6B2	6.2	6.07...6.32	5	10	200	1	0.1	2	2	0.03...0.06
ZMM6B8	6.8	6.66...6.94	5	8	150	1	0.1	2	3	0.03...0.07
ZMM7B5	7.5	7.35...7.65	5	7	50	1	0.1	2	5	0.03...0.07
ZMM8B2	8.2	8.04...8.36	5	7	50	1	0.1	2	6.2	0.03...0.08
ZMM9B1	9.1	8.92...9.28	5	10	50	1	0.1	2	6.8	0.03...0.09
ZMM10B	10	9.8...10.2	5	15	70	1	0.1	2	7.5	0.03...0.1
ZMM11B	11	10.8...11.2	5	20	70	1	0.1	2	8.2	0.03...0.11
ZMM12B	12	11.8...12.2	5	20	90	1	0.1	2	9.1	0.03...0.11
ZMM13B	13	12.7...13.3	5	26	110	1	0.1	2	10	0.03...0.11
ZMM15B	15	14.7...15.3	5	30	110	1	0.1	2	11	0.03...0.11
ZMM16B	16	15.7...16.3	5	40	170	1	0.1	2	12	0.03...0.11
ZMM18B	18	17.6...18.4	5	50	170	1	0.1	2	13	0.03...0.11
ZMM20B	20	19.6...20.4	5	55	220	1	0.1	2	15	0.03...0.11
ZMM22B	22	21.6...22.5	5	55	220	1	0.1	2	16	0.04...0.12
ZMM24B	24	23.5...24.5	5	80	220	1	0.1	2	18	0.04...0.12
ZMM27B	27	26.4...27.6	5	80	220	1	0.1	2	20	0.04...0.12
ZMM30B	30	29.4...30.6	5	80	220	1	0.1	2	22	0.04...0.12
ZMM33B	33	32.3...33.7	5	80	220	1	0.1	2	24	0.04...0.12
ZMM36B	36	35.2...36.8	5	80	220	1	0.1	2	27	0.04...0.12
ZMM39B	39	38.2...39.8	2.5	90	500	0.5	0.1	5	30	0.04...0.12
ZMM43B	43	42.1...43.9	2.5	90	500	0.5	0.1	5	33	0.04...0.12
ZMM47B	47	46...48	2.5	110	600	0.5	0.1	5	36	0.04...0.12
ZMM51B	51	49.9...52.1	2.5	125	700	0.5	0.1	10	39	0.04...0.12
ZMM56B	56	54.8...57.2	2.5	135	700	0.5	0.1	10	43	0.04...0.12
ZMM62B	62	60.7...63.3	2.5	150	1000	0.5	0.1	10	47	0.04...0.12
ZMM68B	68	66.6...69.4	2.5	200	1000	0.5	0.1	10	51	0.04...0.12
ZMM75B	75	73.5...76.5	2.5	250	1000	0.5	0.1	10	56	0.04...0.12
ZMM82B	82	80.3...83.7	2.5	300	1500	0.25	0.1	10	62	0.05...0.12
ZMM91B	91	89.1...92.9	1	450	2000	0.1	0.1	10	68	0.05...0.12
ZMM100B	100	98...102	1	450	5000	0.1	0.1	10	75	0.05...0.12
ZMM110B	110	107.8...112.2	1	600	5000	0.1	0.1	10	82	0.05...0.12
ZMM120B	120	117.6...122.4	1	800	5500	0.1	0.1	10	91	0.05...0.12
ZMM130B	130	127.4...132.6	1	950	6000	0.1	0.1	10	100	0.05...0.12
ZMM150B	150	147...153	1	1250	6500	0.1	0.1	10	110	0.05...0.12
ZMM160B	160	156.8...163.2	1	1400	7000	0.1	0.1	10	120	0.05...0.12
ZMM180B	180	176.4...183.6	1	1700	8500	0.1	0.1	10	130	0.05...0.12
ZMM200B	200	196...204	1	2000	10000	0.1	0.1	10	150	0.05...0.12

¹⁾ Tested with pulses $t_p = 20\text{ ms}$.


²⁾ The ZMM1 is a silicon diode with operation in forward direction. Hence, the index of all parameters should be "F" instead of "Z". Connect the cathode electrode to the negative pole.




CHANGZHOU GUANGDA ELECTRONIC CO. LTD

Dated : 12/06/2009

Breakdown characteristics
 $T_j = \text{constant (pulsed)}$

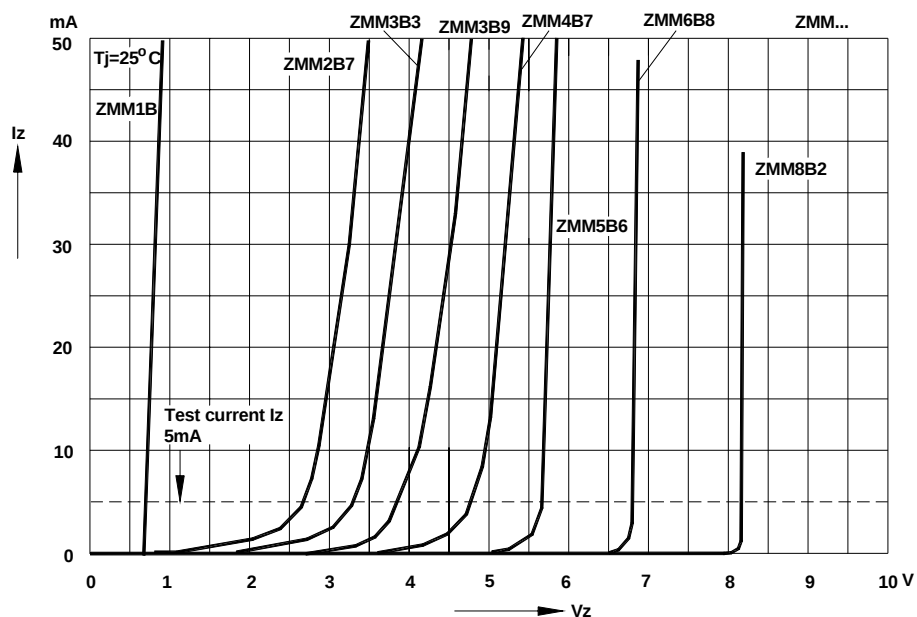


Breakdown characteristics
 $T_j = \text{constant (pulsed)}$

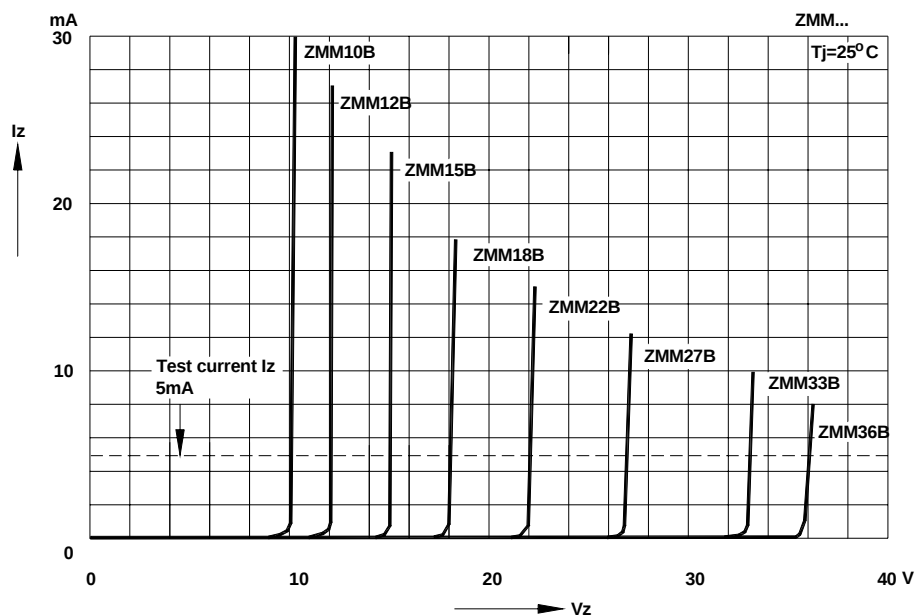


Breakdown characteristics

$T_j = \text{constant (pulsed)}$

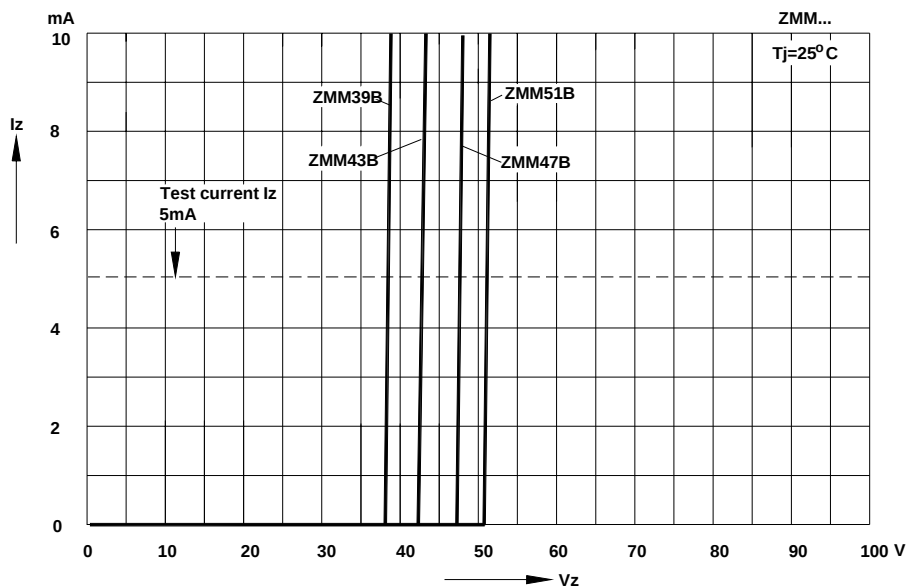


Forward characteristics




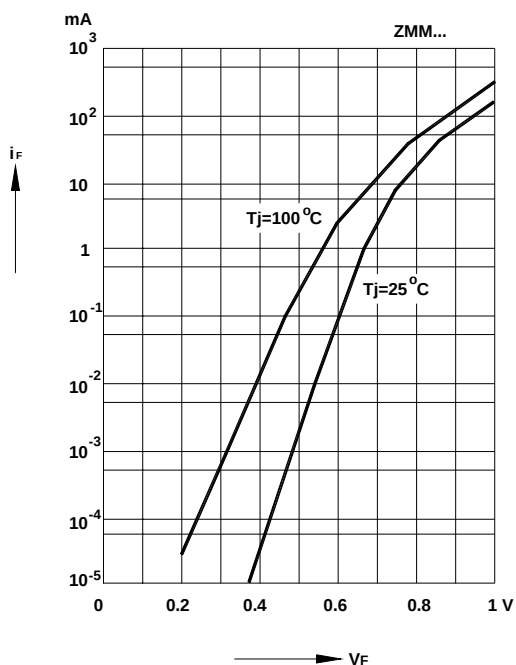


Admissible power dissipation versus ambient temperature

Valid provided that electrodes are kept at ambient temperature.

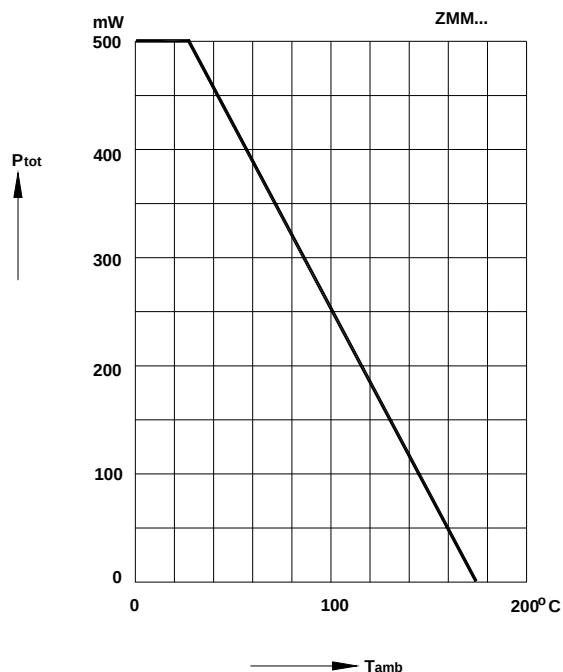





ZMM1B...ZMM200B

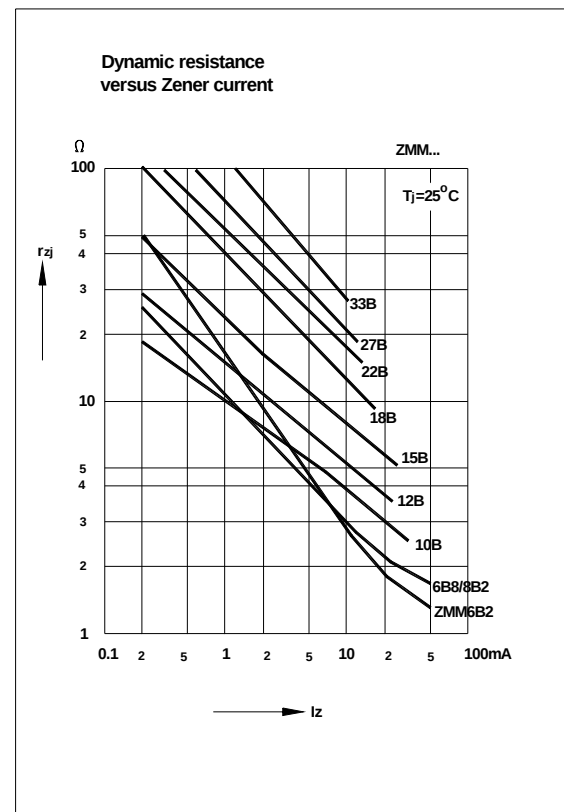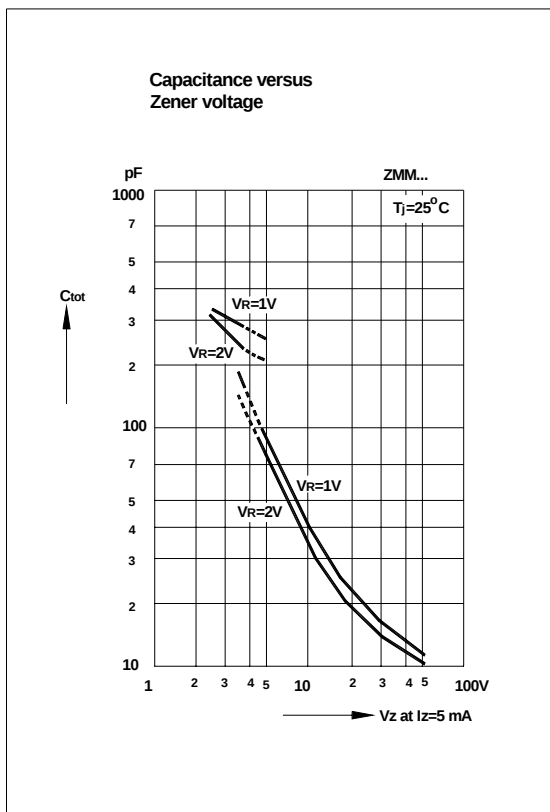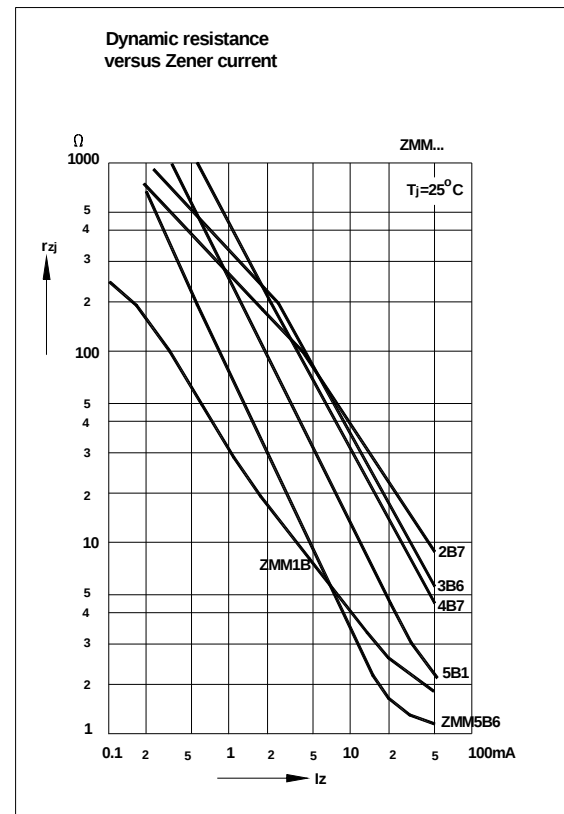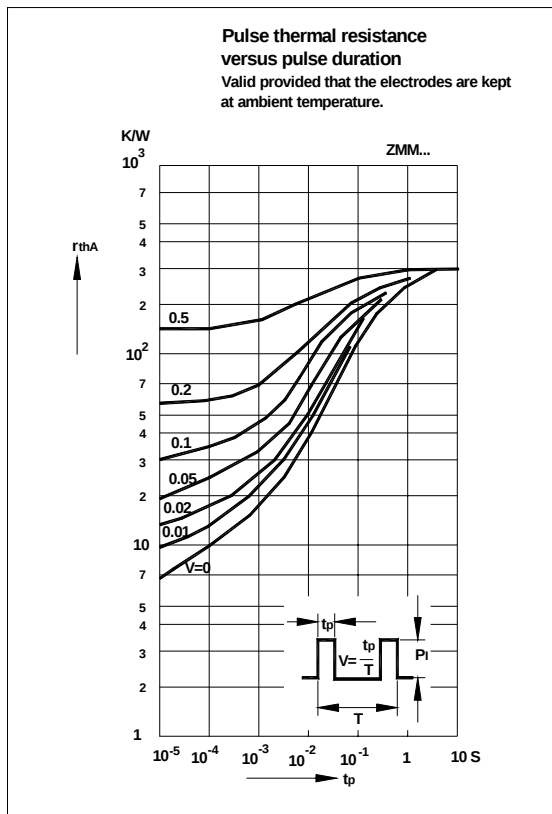

CHANGZHOU GUANGDA ELECTRONIC CO. LTD

Dated : 12/06/2009


ZMM1B...ZMM200B

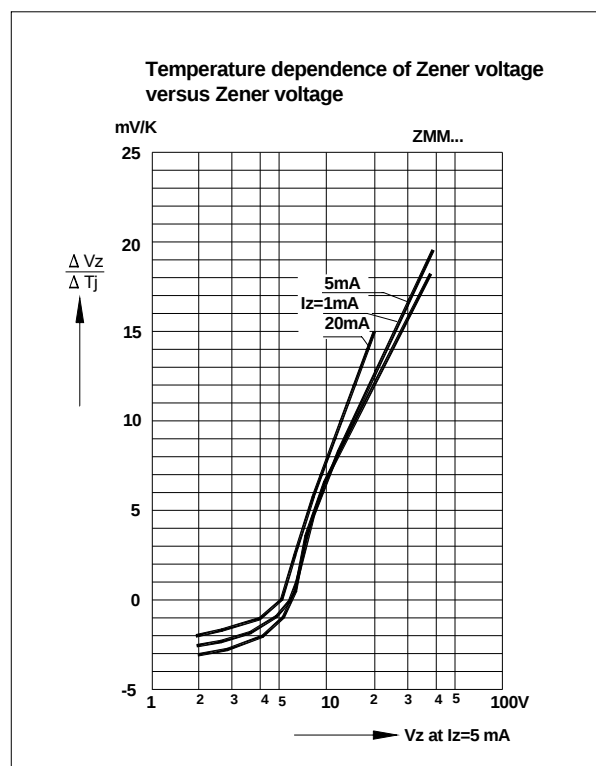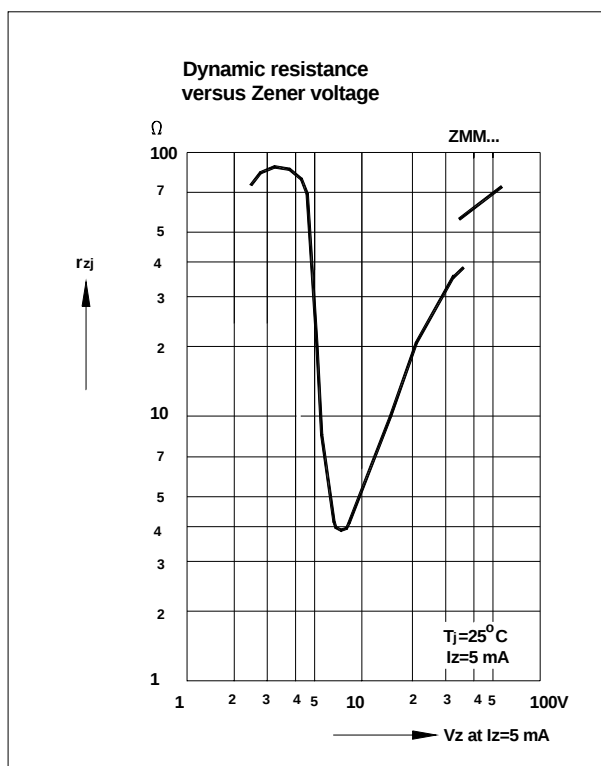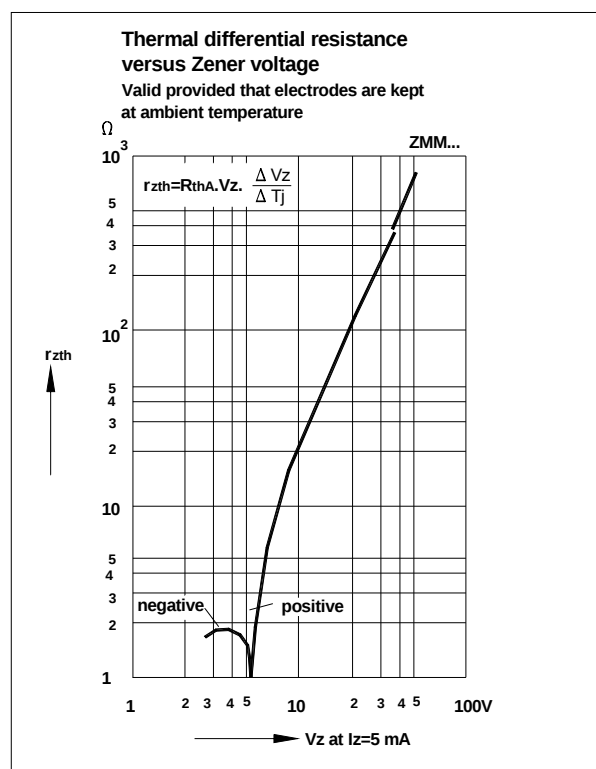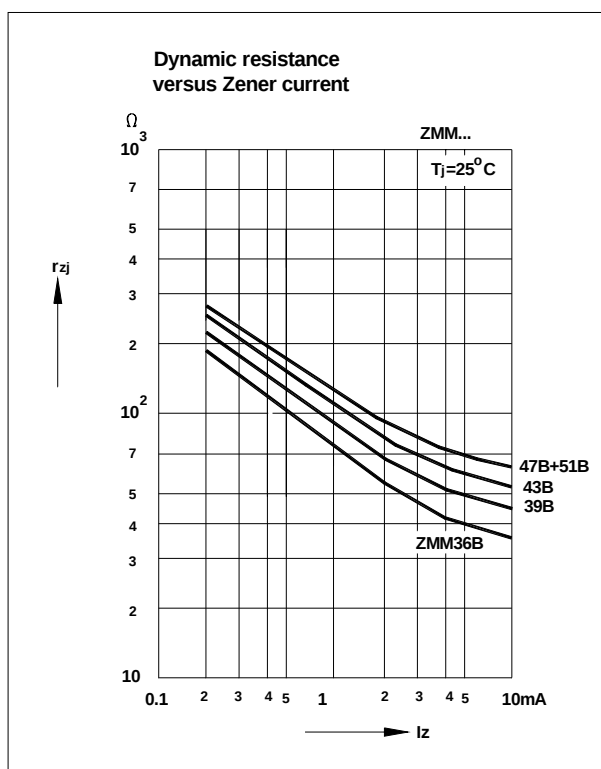


CHANGZHOU GUANGDA ELECTRONIC CO. LTD

Dated : 12/06/2009


Temperature dependence of Zener voltage versus Zener voltage

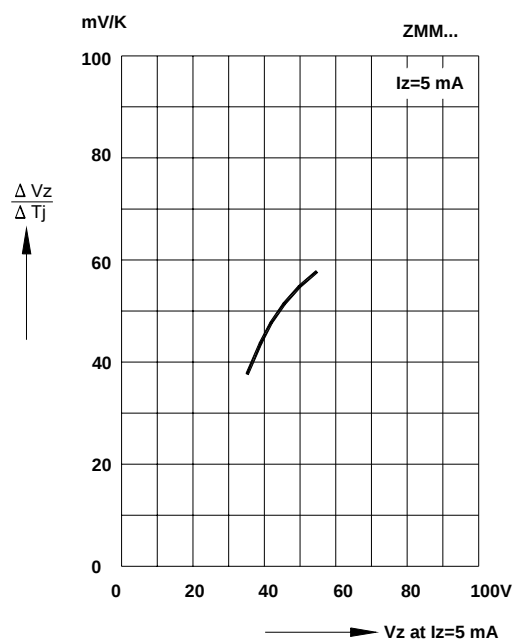

Change of Zener voltage versus junction temperature

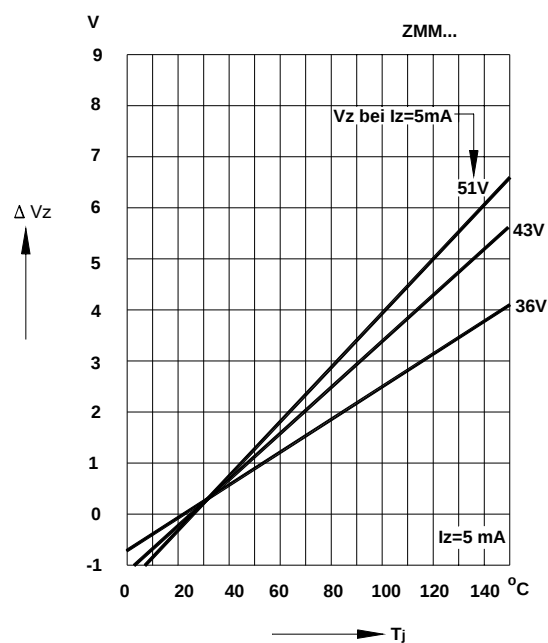

Change of Zener voltage versus junction temperature

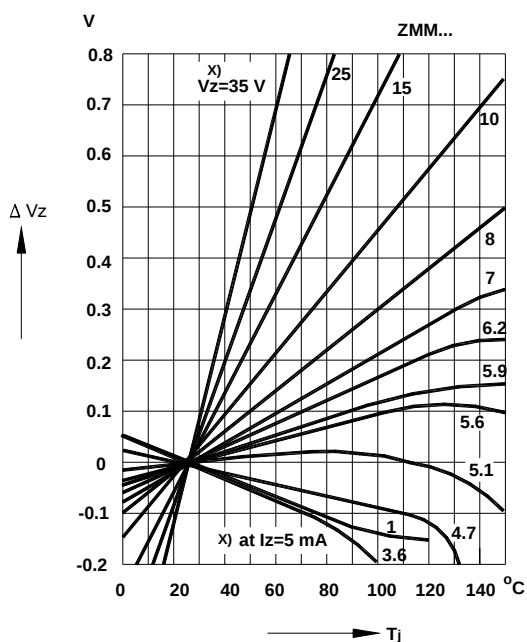

Change of Zener voltage from turn-on up to the point of thermal equilibrium versus Zener voltage

